



# CARGO PROTECTORS, INC.

633 3<sup>RD</sup> Street NE, St. Cloud, MN 56304

[www.cargoprotectors.com](http://www.cargoprotectors.com)

Toll-Free: (800) 728-3038

Phone: (320) 202-6567

Fax: (320) 202-7792

[sales@cargoprotectors.com](mailto:sales@cargoprotectors.com)


## HP2000 / HP2100 Door Hasp

High Security Hasp for Hidden Shackle Padlocks

Provides High Security for Doors


- Made from high carbon steel with full length welds for strength
- Heavy duty galvanized finish for weather resistance
- Can be used in a wide variety of applications where high security is required
- Mounting hardware included

### HP2000 Door Hasp

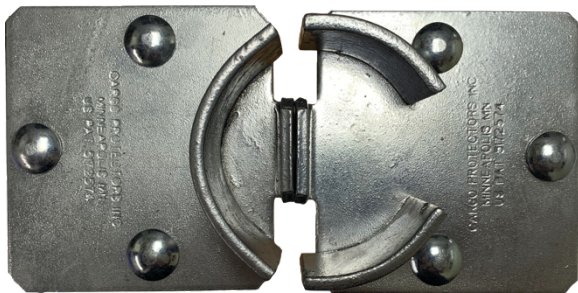

- Three-piece ring with no overlap
- Lock access from side

### HP2100 Door Hasp

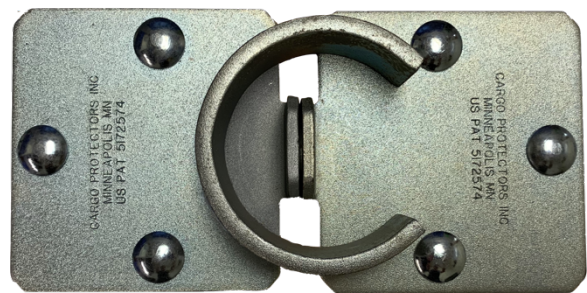

- One-piece ring with overlap
- Lock access from side

## **INSTALLATION INSTRUCTIONS**

1. Make sure you have all required hardware: Hasp (both sides), Lock, (6) 3/8" Carriage Bolts, Nuts, and Fender Washers.
  - a. Suggested item: Small vise grip pliers
2. Put hasp together as it will be installed on the doors making sure bottom is level.
3. Place a fender washer between the eyes of the hasp halves to maintain proper clearance and clamp together with the small vise grip pliers.
4. Using the clamped assembly as a template, mark the 6 holes and drill 7/16" holes at the marked locations.
5. Remove vise grip pliers.
6. Install carriage bolts (length is determined by thickness of mounting surface), with washers and nuts.